




INVESTOR IN PEOPLE



The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 9 July 2004


**PRIORITY****DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

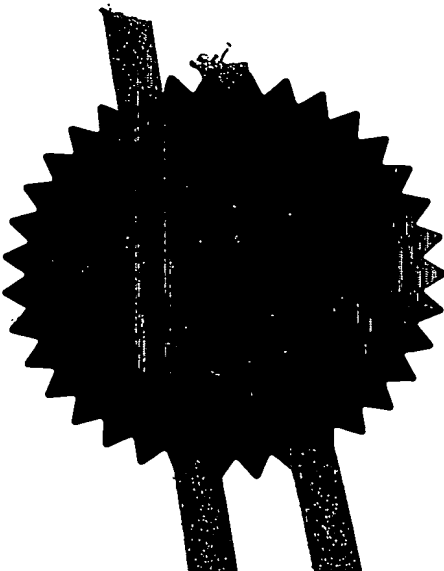**BEST AVAILABLE COPY**

Patent Act 1977  
(Rule)

24 JUN 2003



25JUN03 E812551-1 002624  
01/7700 0-00-0314712.1

1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

JC/SPY/sc

2. Patent application number

(The Patent Office will fill in this part)

0314712.1

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

08659807001

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

Aicom Limited,  
Unit 23,  
City Business Centre,  
6-8 Brighton Road,  
Horsham,

West Sussex. RH13 5BB  
GB

CORDANI, Andrew  
1 Lynwood Road,  
Tooting,  
London.  
SW17 8SB  
GB

08659815001

4. Title of the invention

Resonance and/or vibration measurement device

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

G.F. REDFERN & CO.  
LYNN HOUSE  
IVY ARCH ROAD  
WORTHING  
WEST SUSSEX. BN14 8BX

Patents ADP number (*if you know it*)

1412002 08435356001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

Yes

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d)

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	9
Claim(s)	4
Abstract	1
Drawing(s)	1 + 1

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents


Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature 

Date  
24 June 2003

12. Name and daytime telephone number of person to contact in the United Kingdom  
J.C. Bridge-Butler  
01903 820466

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## Resonance and/or vibration measurement device

This invention relates to a resonance and/or vibration measurement device, for use particularly, but not exclusively with a drum stick.

Drum sticks are traditionally used to strike the surface of a drum, which then resonates and makes a sound. However, with the advance of technology a number of electric or electronic alternatives have been suggested.

It is known to provide a transducer sensor which when struck with a drum stick causes an electronic sound to be created by an associated amplifier. Another known alternative is to provide a motion sensor or accelerometer inside a mock drum stick, which causes an electronic sound to be created by an associated amplifier inside the stick when the stick is struck against any surface.

Both of these arrangements suffer from drawbacks. The transducer sensor to be struck is a complex piece of equipment which can be expensive to build and to purchase. In addition, it must be transported with the drum sticks. However, a real drum stick can be used with these systems, which is preferred by drummers.

The mock drum stick is not popular because it does not feel or respond like a real drum stick, due to the added components, and has only been successfully created as a novelty item. Although, it does benefit from being a stand-alone device which is easy to transport.

The present invention is intended to overcome some of the above problems by providing a novel approach.

According to the present invention a resonance and/or vibration measurement device comprises an elongate member, resonance and/or vibration measuring means and processing means, in which the resonance and/or vibration measuring means records resonance and/or vibration of the elongate member

caused by the striking of a material in use, and the processing means is adapted to identify a predetermined characteristic of the material from the recorded resonance and/or vibration measurement.

The device is intended to measure the reaction of the elongate member caused by the striking of the material in use. This reaction may be in the form of a vibration or reverberation whereby the body of the elongate member moves rapidly back and forth, or it may be in the form of resonance whereby the material resonance of the elongate member is disturbed such that it oscillates or vibrates. The nature of the reaction of the elongate member depends on how hard or dense the material is which is struck, and how hard the elongate member strikes it.

Preferably the processing means can be provided with a programmable database. Further the processing means can be adapted to identify a predetermined characteristic of the material struck by comparing the recorded measurement to recorded measurements stored in the database.

It will be appreciated that the device can be used for a number of purposes. In one construction the device may be used to identify a predetermined characteristic or property of the structure of the material, for example its hardness or structural integrity. With this construction the device can be used to check the density of a wall, or other structure, or whether a component of the wall, for example a concrete layer, has set or not.

However, in a preferred construction the device can be used as a musical instrument, and the elongate member can be a drum stick.

Preferably the processing means can be further provided with signal creation means. Preferably the signal is a MIDI signal, which can be sent to a sound creation device, such as a MIDI controller or computer which can convert the signal into an

audio signal, which can then be recorded or sent to an amplifier and speaker to be played out loud. The MIDI signal may also be recorded.

The resonance and/or vibration measuring means can be a transducer, an accelerometer, a microphone or any other known device which can detect resonance and/or vibration. However, in a preferred construction one or more strips of piezoelectric quartz crystal may be attached to the drum stick, and the signals created by the piezoelectric strips in use can be sent to the processing means.

The processing means can be any suitable computer program run on a computer or processor, which is capable of creating a database, referencing measurements taken with those on the database, and creating MIDI signals to be sent to the sound creation device.

Preferably the drum stick is a conventional wooden, carbon fibre, nylon or steel drum stick. The resonance and/or vibration measuring means can be embedded in the drum stick during manufacture, or it can be retrofitted to an existing drum stick.

The invention also includes a method of using a resonance and/or vibration measurement device comprising an elongate member, resonance and/or vibration measuring means and processing means, in which the resonance and/or vibration measuring means records resonance and/or vibration of the elongate member caused by the striking of a material in use, and the processing means is adapted to identify a predetermined characteristic of the material from the recorded resonance and/or vibration measurement, and in which the processing means is adapted to be able to store recorded resonance and/or vibration measurements taken in use in a database, such that subsequent resonance and/or recorded measurements taken in use can be compared with them, and MIDI signal creation means, including the steps of:

- 1) Striking a material with the elongate member, causing it to resonate and/or vibrate such that a recorded measurement is taken by the resonance and/or vibration measuring means.
- 2) Storing the recorded measurement or one or more predetermined characteristics of the recorded measurement, in the database.
- 3) Determining a MIDI signal to be created when the processing means matches a recorded measurement taken in step 5) with a recorded measurement taken in step 1).
- 4) Repeating steps 1) to 3) a desired number of times with different materials, until a desired number of recorded measurements are stored in the database,
- 5) Striking a material struck with the elongate member in step 1), causing it to resonate and/or vibrate such that a recorded measurement is taken by the resonance and/or vibration measuring means.
- 6) Referring the recorded measurement taken in step 4) to those stored in the database in step 2) to find a match.
- 7) Creating the MIDI signal determined in step 3).

The invention also includes a resonance and/or vibration measurement device comprising resonance and/or vibration measuring means adapted to be fitted to an elongate member with which the device is to be used, and processing means, in which the resonance and/or vibration measuring means records resonance and/or vibration of the elongate member with which it is used, which is caused by the striking of a material in use, and the processing means is adapted to identify a predetermined characteristic of the material from the recorded resonance and/or vibration measurement.

The invention can be performed in various ways, but one embodiment will now be described by way of example and with reference to the accompanying drawing in which Figure 1 is a diagrammatic view of a drum stick device according to the present invention.

In Figure 1 a resonance and/or vibration measurement device in the form of electronic drum machine apparatus 1 comprises an elongate member, in the form of drum sticks 2 (shown in cross section), resonance and/or vibration measuring means in the form of piezoelectric quartz crystal strips 3, and processing means in the form of computer processor 4, which is housed inside a computer unit box 5.

The piezoelectric strips 3 are disposed inside the drum sticks 2, which are constructed from wood. The piezoelectric strips 3 are connected to an input jack 6 provided in the computer unit 5 by means of signal wires 7.

Input jack 6 is connected to the computer processor 4, which comprises controlling sub program 8, electric signal measurement database 9, MIDI signal database 10 and a MIDI signal generation sub program 11. The computer unit 5 is also provided with a control pad 12 provided with input keys 13, MIDI controller 14, amplifier 15, speaker 16, recording mechanism 17, battery 18 and output jack 19.

In use, one or other of the drum sticks 2 are struck against a material, such that they resonate and/or vibrate. The movement causes the piezoelectric strips 3 to flex, which creates an electric signal. The signal is sent via the wires 7 to the input jack 6, and onto the controlling sub program 8.

The controlling sub program 8 then compares the signal, or a predetermined characteristic of the signal, to signals contained in the database 9. When a match is found, the corresponding MIDI signal designated to the incoming signal is raised from the MIDI signal database 10 and an outgoing MIDI signal is created by the MIDI signal generation sub program 11. The outgoing MIDI signal is sent to the MIDI controller, where it is either sent to the output jack 19 as a MIDI signal or an audio signal, or it is sent as an audio signal to the amplifier 15 and speaker 16 to be played, and/or the recording mechanism 17 to be stored. (The recording mechanism can be any known system.)



Accordingly a preferred method of using the drum machine apparatus 1 comprises the following steps.

- 1) The device 1 is switched to a "store" mode via the control pad 12.
- 2) One or other of the drum sticks 2 is struck against a first material, for example a wooden table top (not shown).
- 3) The electric signal sent from the piezoelectric strip 3 is received by the controlling sub program 8, which stores it in the electric signal measurement database 9.
- 4) The user then chooses a sound to be designated to the first material by accessing the MIDI signal database 10 via the control pad 12. (The user can listen to a sound before choosing it, by playing it through the speaker 16, via the MIDI signal generation sub program 11, the MIDI controller 14 and the amplifier 15. The user can therefore listen to a number of sounds, before choosing a desired one.).
- 5) Steps 2 – 4 are repeated a desired number of times with different materials being struck, for example a ceramic plate, a mouse mat or a pad of paper, with different sounds chosen to be created. (The two sticks could also be struck together to create an individual signal).
- 6) The device 1 is switched to a "play" mode via the control pad 12.
- 7) One or other of the drum sticks 2 are then struck against any of the materials struck in step 2.
- 8) The electric signal sent from the piezoelectric strip 3 is sent to the controlling sub program 8, where it is referenced against the signal measurements contained in the database 9.
- 9) When a match is found the corresponding MIDI signal designated in step 4 is sent to the MIDI signal generation sub program 11, which generates the signal and sends it to the MIDI controller 14, where it is either sent to the output jack 19 as a MIDI signal or an audio signal, or it is sent as an audio signal to the amplifier 15 and speaker 16 to be played, and/or the recording mechanism 17 to be stored.

- 10) Steps 7 to 9 are repeated indefinitely to create a musical sequence.

It will be appreciated that two drum sticks will not react in exactly the same way when struck against the same material. Therefore, in an alternative embodiment the device 1 can be adapted to allow each stick to create a different sound when struck against the same material. Steps 2 – 4 as described above would be repeated for each of the two drumsticks, and the signals sent to the controlling sub program 8 in steps 2 and 8 are adapted to be identifiable as having emanating from the first or the second drum stick.

Further, the device 1 can be enhanced by providing the controlling sub program 8 with the ability to distinguish a predetermined characteristic of the electric signal sent from the sticks 2. Each time a stick 2 is struck against a material the signal will not be identical. However, there may be a clear characteristic of the signal which can be readily identified inside given tolerances, as having been generated when a one material, and not another, has been struck. It will be appreciated that the predetermined characteristic and the given tolerances could be any number of things, and these will be pre-programmed into the device 1.

In addition, once an electric signal is recognised as having been generated when a particular material has been struck, the controlling sub program 8 can be adapted to alter various characteristics of any MIDI signal generated in relation to the signal received. For example, if the electric signal is weak the controlling sub program 8 can generate a low volume MIDI signal and so on. Further, if signals are created one after the other quickly, the controlling sub program 8 can merge the MIDI signals created to form a portamento effect – for example a drum roll.

It will be appreciated that the device 1 can be used with other equipment which can recognise a MIDI or audio signal as emitted via the output jack 19. For example, the unit 5 could be connected to another amplifier and speaker or recording mechanism via the jack 19.

In an alternative embodiment (not shown) the piezoelectric strips 3 are replaced with a retro-fitted externally mounted strip which can be fitted to an existing pair of drum sticks.

In a further alternative embodiment the device can be provided with proximity measuring equipment which could be utilised to recognise the exact location of one or other of the drum stick in relation to a given point. This could be used to alter the sounds or MIDI signals created or recorded depending on whereabouts on a particular material the drum stick was struck. With such an arrangement the device could alter a drum sound created or recorded to correspond to the sounds which would be made if a real drum were struck in the centre or at the edge. The proximity measuring equipment could be any known mechanism, for example an electrostatic or magnetic field can be generated in a region of interest, and the field can be detected by the drumstick. A coil could be incorporated into the body of the drumstick to detect the field, and this information would be relayed to the controlling sub program 8, to be included into the way the MIDI signals are created.

It will be appreciated that a device similar to device 1 described above can be used for a number of alternative purposes. In one alternative embodiment (not shown) a device is substantially similar in construction to device 1, except the drum sticks are replaced with a tapping hammer, and the computer unit is adapted to display a resonance and/or vibration signal reading instead of creating and emitting a sound. With this arrangement the tapping hammer can be struck against a surface, and information about the surface can be revealed in the resonance and/or vibration signal itself, or via access to a database. Therefore the density of a wall, or other structure, can be checked, or a component of the wall, for example a concrete layer, can be checked for its condition.

Thus an automatic drum machine is provided which utilises preferred real drum sticks, but does not require transducer sensors or the like to be struck. The

device can be readily transported, and music created with any materials which come to hand.

## Claims

1. A resonance and/or vibration measurement device comprising an elongate member, resonance and/or vibration measuring means and processing means, in which the resonance and/or vibration measuring means records resonance and/or vibration of the elongate member caused by the striking of a material in use, and the processing means is adapted to identify a predetermined characteristic of the material from the recorded resonance and/or vibration measurement.
2. A resonance and/or vibration measurement device as claimed in Claim 1 in which the processing means is provided with a database of measurements, and in which the processing means is adapted to identify a predetermined characteristic of the material struck in use by comparing the recorded measurement taken in use with measurements stored in the database.
3. A resonance and/or vibration measurement device as claimed in Claim 2 in which the processing means is adapted to be able to store recorded measurements taken in use in the database, such that subsequent recorded measurements taken in use can be compared with them.
4. A resonance and/or vibration measurement device as claimed in Claim 2 or 3 in which the processing means is adapted to identify a predetermined physical characteristic of the material from the recorded measurement taken in use.
5. A resonance and/or vibration measurement device as claimed in Claim 2 or 3 in which the processing means is adapted to match the recorded measurement taken in use with a recorded measurement stored in the database.
6. A resonance and/or vibration measurement device as claimed in Claim 5 in which the processing means is adapted to match one or more predetermined characteristics of the recorded measurement taken in use with the corresponding

one or more predetermined characteristics of a recorded measurement stored in the database.

7. A resonance and/or vibration measurement device as claimed in Claim 6 in which the processing means is adapted to find a match if the one or more predetermined characteristics of the recorded measurement taken in use are within a predetermined tolerance range of the corresponding one or more predetermined characteristics of a recorded measurement stored in the database.

8. A resonance and/or vibration measurement device as claimed in Claim 7 in which the processing means is provided with MIDI signal creation means, and in which a predetermined MIDI signal is created when the processing means finds a match in use.

9. A resonance and/or vibration measurement device as claimed in Claim 8 in which one or more predetermined characteristics of the MIDI signal created are determined by the location of the one or more predetermined characteristics of the recorded measurement taken in use within said predetermined tolerance range.

10. A resonance and/or vibration measurement device as claimed in Claim 9 in which the device is provided with means to record one or a sequence of MIDI signals created in use, and/or means to convert one or a sequence of MIDI signals created in use into an audio signal, and to relay and/or record the MIDI and/or audio signal.

11. A resonance and/or vibration measurement device as claimed in any of Claims 5 - 10 in which the elongate member is a drum stick or a pair of drumsticks.

12. A resonance and/or vibration measurement device as claimed in Claim 11 in which the vibration measuring means is one or more elongate strips of piezoelectric quartz crystal in contact with the drum stick, or each of the pair of drum sticks, and in which the recorded measurement taken in use is an electric signal created by the

piezoelectric quartz crystal when the drum stick or one of the drum sticks strikes a material in use and resonates and/or vibrates.

13. A resonance and/or vibration measurement device as claimed in Claim 12 in which the one or more elongate strips of piezoelectric quartz crystal are mounted inside the shaft of the drum stick, or each of the pair of drum sticks.

14. A resonance and/or vibration measurement device as claimed in Claim 13 in the one or more elongate strips of piezoelectric quartz crystal are connected to the processing means by electric signal wires.

15. A resonance and/or vibration measurement device as claimed in any of the preceding Claims in which the processing means is a computer program run on a computer and in which the computer program comprises a controlling sub program, a resonance and/or vibration measurement database, a MIDI signal database and a MIDI signal generation sub program.

16. A resonance and/or vibration measurement device according to Claim 15 in which the device is provided with proximity measuring means adapted to identify the location of the drum stick or one of the drum sticks, in relation to a predetermined point in space, and in which one or more of the predetermined characteristics of the MIDI signal created in use are determined by the location of the drum stick or one of the drum sticks in relation to the predetermined point when they strike the material.

17. A resonance and/or vibration measurement device comprising resonance and/or vibration measuring means adapted to be fitted to an elongate member with which the device is to be used, and processing means, in which the resonance and/or vibration measuring means records resonance and/or vibration of the elongate member with which it is used caused by the striking of a material in use, and the processing means is adapted to identify a predetermined characteristic of the material from the recorded resonance and/or vibration measurement.

18. A resonance and/or vibration measurement device substantially as described herein and as shown in the accompanying drawing.

19. A method of using a resonance and/or vibration measurement device according to Claim 8, including the steps of:



- 1) Striking a material with the elongate member, causing it to resonate and/or vibrate such that a recorded measurement is taken by the resonance and/or vibration measuring means.
- 2) Storing the recorded measurement or one or more predetermined characteristics of the recorded measurement, in the database.
- 3) Determining a MIDI signal to be created when the processing means matches a recorded measurement taken in step 5) with a recorded measurement taken in step 1).
- 4) Repeating steps 1) to 3) a desired number of times with different materials, until a desired number of recorded measurements are stored in the database.
- 5) Striking a material struck with the elongate member in step 1), causing it to resonate and/or vibrate such that a recorded measurement is taken by the resonance and/or vibration measuring means.
- 6) Referring the recorded measurement taken in step 4) to those stored in the database in step 2) to find a match.
- 7) Creating the MIDI signal determined in step 3).

20. A method according to Claim 19 in which the elongate member comprises two drum sticks, and steps 1) to 4) are repeated separately for each drum stick, and in which the processing means is adapted to differentiate between the recorded measurements taken by each of the drum sticks in use.



Abstract

A resonance and/or vibration measurement device comprising an elongate member, resonance and/or vibration measuring means and processing means, in which the resonance and/or vibration measuring means records resonance and/or vibration of the elongate member caused by the striking of a material in use, and the processing means is adapted to identify a predetermined characteristic of the material from the recorded resonance and/or vibration measurement.

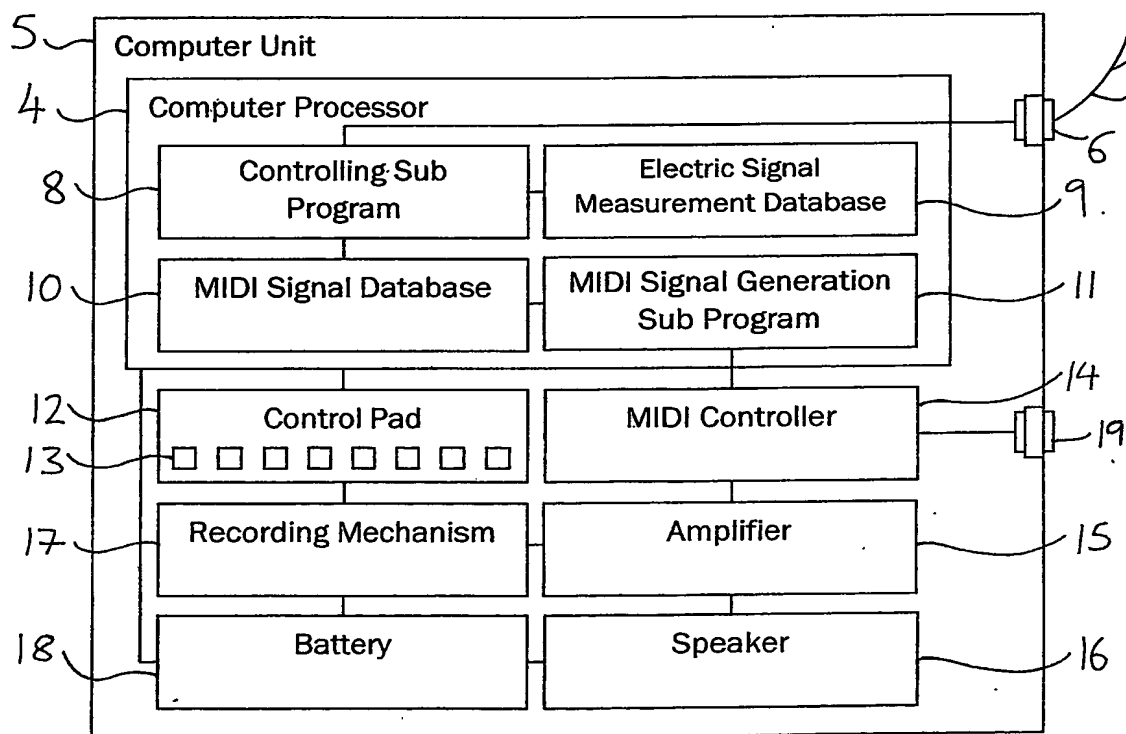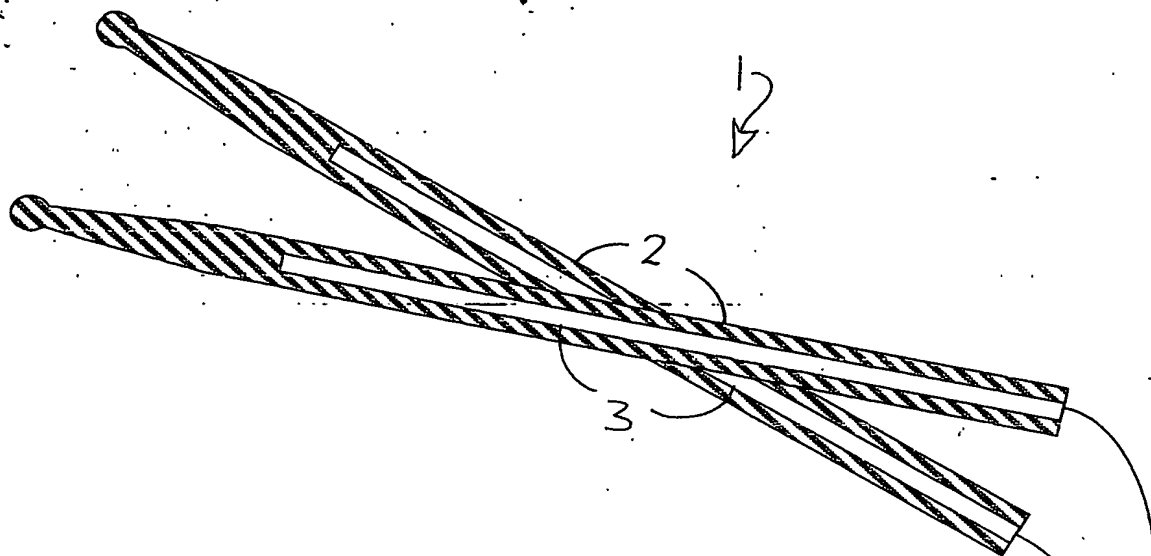

**PCT/GB2004/002746**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**